

Programmable Operator Interface

MONITOUCH

Consolidating Essential Functionality while Enhancing Operability and Visibility

TECHNOSHOT TS1000 Smart series

- WVGA
- 64K Colors
- TFT
- LED Backlight
- 3ch Serial
- Master/Slave USB
- Ethernet (i type only)

- Supports remote operation via VNC server
- CE/KC/UL/cUL compliant
- FROM capacity significantly expanded by 2.2 times* (26 MB)

*Compared with TS1000 series



Specifications

Item		TS1070S	TS1070Si	TS1100Si
Main unit specifications	Screen size	7.0" widescreen		10.2" widescreen
	Display device	TFT color		
	Resolution	800 x 480 dots		
	Colors	65,536 colors		
	Backlight	LED		
	Touch screen	Analog resistive		
	Certifications	CE/KC/UL/cUL		
User memory	FROM	26 MB		
	SRAM	128 KB		
External interface specifications	COM1 D-Sub 9 pin (female)	RS-422/RS-485 (4-wire/2-wire) Data length: 7, 8 bits Parity: Even, odd, none Stop bit: 1, 2 bits Baud rate: 4800, 9600, 19200, 38400, 57600, 76800, 115200, 187500*1bps		
	COM2/COM3 D-Sub 9 pin (male)	COM2: RS-232C COM3: RS-422/RS-485 (2-wire) Data length: 7, 8 bits Parity: Even, odd, none Stop bit: 1, 2 bits Baud rate: 4800, 9600, 19200, 38400, 57600, 76800, 115200 bps		
	LAN RJ-45	-	1 ch	
	USB-A	1 ch		
	USB mini-B	1 ch		
Power supply	Permissible range of voltage	24 V DC ±10%		
	Power consumption (max. rating)	11W or less		12W or less
Physical environment	Ambient temperature	0 to 50°C*2		
	Ambient humidity	85% RH or lower (non-condensing)*2		
	Contamination level	2		
	Operation altitude	2,000 m or less		
	Atmosphere	Not to be exposed to corrosive gas, or conductive dust		
	Storage ambient temperature	-10 to 60°C*2		
	Storage ambient humidity	85% RH or lower (non-condensing)*2		
Installation conditions	Protective structure	IP65 equivalent (when using waterproof gasket*3), IP40 equivalent (when not using waterproof gasket*3)		
	Panel front	IP20 equivalent		
	Dimensions W x H x D	198.8 x 141.8 x 38.0 mm		266.8 x 206.8 x 38.0 mm
	Panel cutout	189.0 x 134.0 (+0.5/-0) mm		257.0 x 199.0 (+0.5/-0) mm
Case color		Black		

*1 187500 bps is only relevant to Siemens AG MPI/PPI communications.

*2 Use at a wet-bulb temperature of 39°C or lower to avoid any damage.

*3 This is an optional item.



Model

T S 1 **0 S**

Display size

07: 7.0" widescreen



10: 10.2" widescreen

Interface

i: Built-in LAN

None: No built-in LAN

Dimensions and Part Names

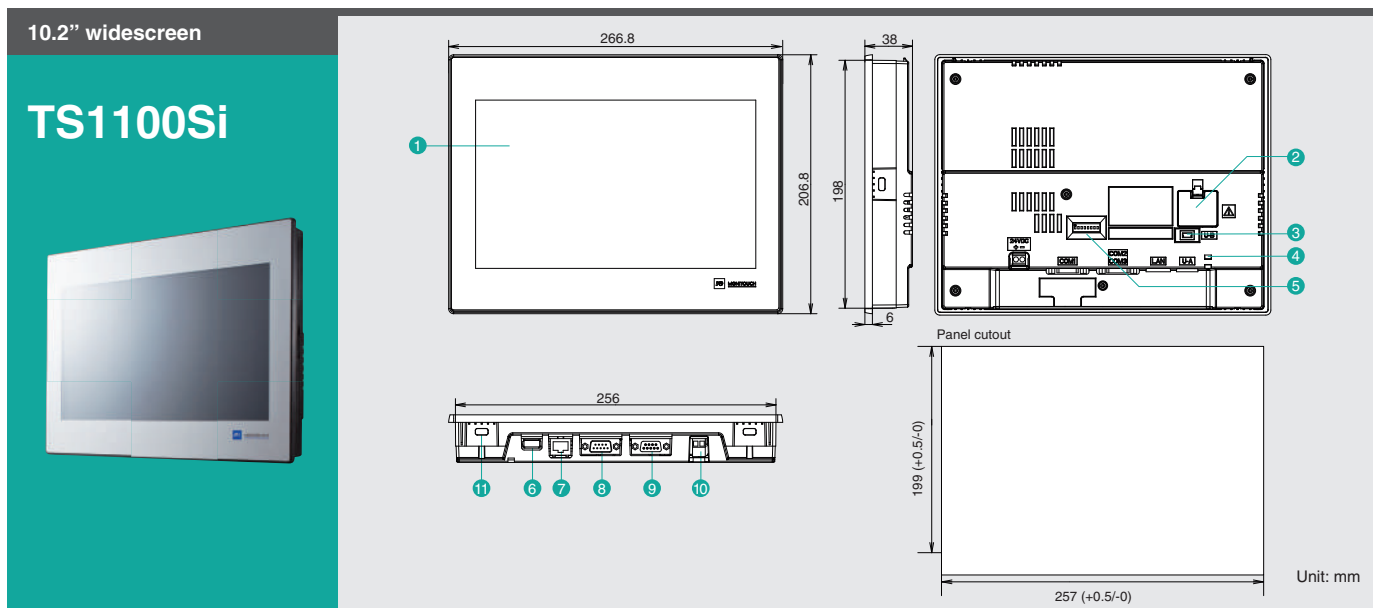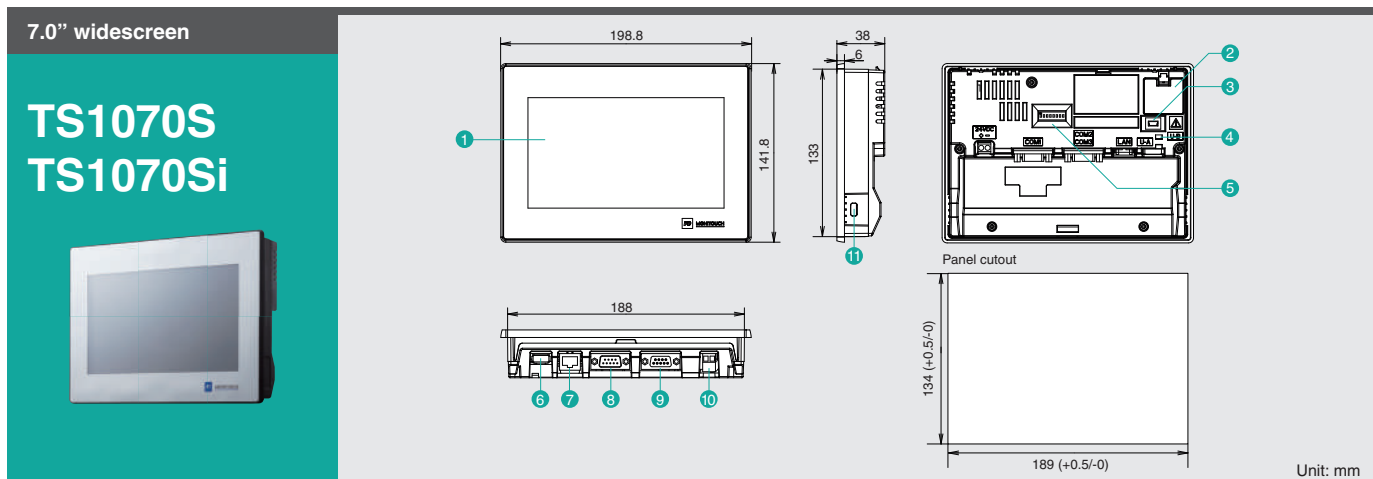

Part Names

- | | | |
|-----------------------|---|---|
| ① Display | ⑤ Dip switch | ⑧ RS-232C/RS-422/RS-485 connector (COM2/COM3) |
| ② Battery compartment | ⑥ USB-A (U-A) | ⑨ RS-422/RS-485 connector (COM1) |
| ③ USB mini-B (U-B) | ⑦ Ethernet port 100BASE-TX/10BASE-T (LAN)
<small>*TS1070Si/TS1100Si only</small> | ⑩ Power input terminal block |
| ④ USB cable retention | | ⑪ Mounting point |

Fuji Electric Co., Ltd.

URL : <http://www.fujielectric.com/>
 Gate City Ohsaki, East Tower,
 11-2, Ohsaki 1-chome, Shinagawa-ku, Tokyo 141-0032, Japan
 Phone : +81-3-5435-7066
 Fax : +81-3-5435-7420

<http://www.monitouch.com/>